STAR-LIGHT PLUS™

H.265 H.264/MJPG **30fps**

NDAA COMPLIANT PRODUCT

Dimensions
Unit: Inch (mm)

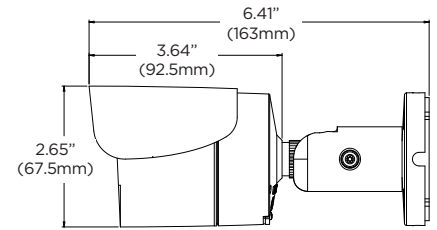6.41" (163mm)
3.64" (92.5mm)
2.65" (67.5mm)

Specifications

Onvif FC c(UL)us LISTED

Summary

This NDAA-compliant MEGApix® IP camera provides 5MP resolution at real-time 30fps and includes a 4.0mm fixed lens. The camera is powered by Star-Light Plus™ color in near-total darkness technology for quality video in any lighting conditions, all in an IP67 dust-tight and waterproof bullet housing.

Features

- 5MP sensor at real-time 30fps
- Star-Light Plus™ color in near-total darkness technology
- 4.0mm fixed lens
- True Wide Dynamic Range (WDR) for clear images in challenging light
- Simultaneous streaming and multiple codec options for smart bandwidth management
- 100' Smart IR™ with intelligent camera sync for clear B/W images with no need for external light
- Smart DNR™ 3D digital noise reduction reduces noise and ghosting for motion in low-light environments.
- Privacy zones cover sensitive areas in the camera's field of view.
- Local SD card slot for local recording in case of network loss
- Web server built-in for easy camera management from any browser
- PoE and DC12V for single cable simplified installation
- NDAA compliant for federal and government projects
- IP66- and IK10-rated camera housing built to last
- 5 year warranty

Accessories (optional)

DWC-B7JUNCW
Junction box

IMAGE	
Image sensor	5MP 1/2.8" CMOS
Total pixels	2592(H) X 1944(V)
Minimum scene illumination	0.16 lux (color)
	0.0 lux (B/W)
LENS	
Focal length	4.0mm, F2.0
Lens type	Fixed lens
HFOV / VFOV	82.3° / 58.8°
IR distance	100ft range
OPERATIONAL	
Intelligent Video Analytics	Intrusion, line crossing, counting line, loitering, enter, exit, tamper, object removed, tailgating, direction, stopped, appear, disappear, object left, logical rules.*
	NOTE: object removed, tailgating, direction, stopped, appear, disappear, object left, and logical rules are available via IVA+ plugin update. For existing cameras, contact your DW sales representative for a complimentary update.
Shutter speed	1/15 ~ 1/32000
Slow shutter	1/2, 1/3, 1/5, 1/6, 1/7.5, 1/10
Auto gain control	Auto
Day and night	Auto, day (color), night (B/W)
3D digital noise reduction	Smart DNR™ 3D-DNR
Wide Dynamic Range (WDR)	True WDR
Wide Dynamic Range (WDR) dB	120dB
Privacy zone	16 programmable privacy masks
Mirror and flip	Yes
Alarm notifications	E-mail notifications, FTP and SD card recording
Memory slot	Micro SD / SDHC / SDXC (card not included)
NETWORK	
LAN	RJ45 (10/100Base-T)
Video compression type	H.265, H.264, MJPEG
Resolution	H.265, H.264: 2592x1944, 2304x1296, 2.1MP/1080p, 720p, VGA, D1, CIF
	MJPEG: 2.1MP/1080p, 720p, 800x600, VGA, 768x432, D1, CIF
Frame rate	Up to 30fps at all resolutions
Video bitrate	100Kbps ~ 10Mbps, multi-rate for preview and recording
Bitrate control	Multi streaming CBR/VBR at H.264, H.265 (controllable frame rate and bandwidth)
Streaming capability	Dual-stream at different rates and resolutions
IP	IPv4, IPv6
Protocol	TCP/IP, UDP, AutoIP, RTP (UDP/TCP), RTSP, NTP, HTTP, HTTPS, SSL, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SN-MPv1/v2/v3 (MIB-2), ONVIF
Security	HTTPS (TLS), IP filtering, 802.1x, digest authentication (ID/PW)
ONVIF conformance	Yes
Web viewer	OS: Windows®, Mac® OS, Linux®
	Browser: Internet Explorer®, Google Chrome®, Mozilla Firefox®, Safari®
	NOTE: Chrome is recommended for IVA configuration
Video management software	DW Spectrum®
ENVIRONMENTAL	
Operating temperature	-4°F ~ 122°F (-20°C ~ 50°C)
Operating humidity	10-90% (non-condensing)
IP rating	IP67-rated
Other certifications	UL listed, CE, FCC, RoHS
ELECTRICAL	
Power requirement	DC 12V, PoE (IEEE 802.3af Class 3), Adapter not included
Power consumption	DC12V: max 6.5W
	PoE: max 8.3W
MECHANICAL	
Material	Aluminum bullet housing
Dimensions	6.41" x 2.65" (163 x 67.5 mm)
Weight	1.1 lbs (0.5kg)
Warranty	5 year warranty

Built for Users.™

866.446.3595   sales@digital-watchdog.com   www.digital-watchdog.com

DW®